

GL-H05 密錄遙控器 Full HD 1080P 低照度針孔攝影機蒐證器

產品說明



[操作]

開機：按一下電源鍵(綠燈)表示開機，等約 5 秒後開機完成。

錄影：待機狀態(綠燈)按一下錄影鍵，進行錄影(紅燈)。

存檔：錄影狀態(綠燈+紅燈)按一下錄影鍵，錄影結束(存檔)，回到待機狀態(綠燈)。

拍照：待機狀態(綠燈)按一下拍照鍵，紅燈會閃爍一次，紅燈熄表示拍照完成。

關機：待機狀態(綠燈)按一下關機鍵，工作指示燈熄滅。

充電：充電時綠燈，充飽-指示燈熄滅。

[日期設定]

在根目錄下新增一個 `settime(txt 文件檔)`，例如(2017 年 3 月 1 日 上午 8 點 6 分 6 秒)

2017.03.01 08:06:06


或在記憶卡的根目錄下有 `settime` 資料夾，進入直接點選 `settime.bat` 的批次檔，會自動抓取您電腦的時間，設定好後，開機測試影一小段。

Key Chain FHD 1080P DVR Model: GL-H05

Description



LED Indicators
Red LED - Rec/Photo
Green LED - Power On
Green LED - Charging
Green LED goes off -Fully charged

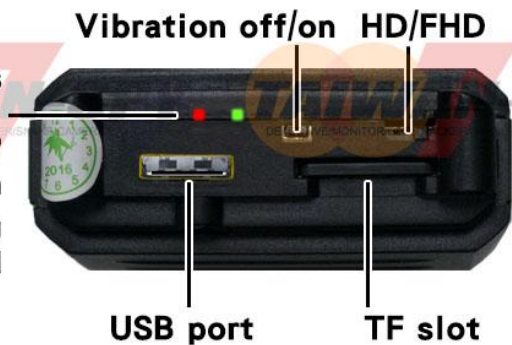

[Charging the Battery]

Connect the device to an USB power source via USB cable.

Solid Green LED - the device is charging(Green LED goes off - the device is fully charged).

[Date & Time setting (for Windows system)]

(1)from the desk top right-click to open Notepad, create a text(.txt)file names settime

(2)For example, suppose the times is 2017/2/1; PM08:00,please enter 2017.02.01 20:00:00

(3)Save the file to the root directory of the TF card.

[Operation]

Setting **Vibration** off/on; Resolution **HD/FHD**

Power on: Press Power on/Rec key once, 10 seconds after device to standby(**Green LED**).

Recording: Press Power on/Rec key once to recording(**Green & Red LED**).

Stop recording: Press Power on/Rec key again and Red LED will turn off.

Take Photo: The device to standby mode(**Green LED**), press Photo key once(**Red LED will blink**).

Power off: The device to standby mode(**Green LED**), press Power on/Rec key once to turn off the device. The Green LED will trun off.